

CDS-218 NEPTUNE

APPLICATIONS

| | |
|--------------------------------|--------------------------------|
| Auditorium Sound Reinforcement | House of Worship Installations |
| Sports Facilities | Theatrical Sound Installations |
| Audio-Visual Systems | Nightclub Installations |
| Portable Sound Reinforcement | Low Frequency Special Effects |

DESCRIPTION

The CDS-218 is a very high output low frequency loudspeaker system designed to provide high output and high fidelity extended low frequency audio reproduction. The CDS-218 incorporates our proprietary tuned, damped, OPTM clam shell alignment, providing greater output and low distortion. Artifacts and vent turbulence, even at extreme levels, are reduced. This makes the CDS-218 an ideal choice for super high level systems requiring stability and reliability under the most demanding long term use. Designed for portable or installation use, the CDS-218 is constructed from 18mm Baltic birch plywood and features a durable and attractive black Ro Tex™ finish, durable steel grille, integral handles and casters.



SPECIFICATIONS

System Type:

Vented

Input Connector:

Dual Neutrik® speakON

Low Frequency Limit:

32 Hz (-10 dB)

Dimensions:

22" h x 46" w x 36" d
56 cm x 117 cm x 91 cm

Enclosure:

18 mm 13-ply birch plywood

Internal Amplification:

Optional self powered

Power Handling:

2400 W continuous (AES) 4800 W program

Weight:

248.5 lbs
113 kg

Finish:

Black Ro Tex™ true water born environmental finish

Hardware:

8 - Machined aluminum speaker mounting clamps

Recommended Amplifier Power:

2400 to 4800 W at rated impedance

Custom Finishes:

Optional custom finishes include white, unfinished ready to paint and outdoor weather treatment.

Grille:

14 Gauge black powder coated perforated steel

Crossover Type:

Requires DSP

Rated Impedance:

4 ohms

Polarity:

A positive asymmetrical signal applied to the + terminal will result in a positive asymmetrical acoustical pressure

Low Frequency Components:

2 - E-18C Transducers, 18" Cones, 4" Voice coil

Sensitivity:

103 dB SPL (2.83 V @ 1 m)

Frequency Response:

44 Hz – 150 Hz

BAG END® is a registered trademark of Bag End, Inc.

CDS-218 NEPTUNE

ABOUT OUR RO TEX™ FINISH


The durable Ro Tex™ finish is found on Bag End™ "R" series or Road cabinets. Ro Tex™ is a water base, environmentally safe finish that is made in Europe and is uniquely strong and long lasting. As it solidifies and attaches to the wooden cabinet it bonds with the wood to make a super hard permanent finish. It is lightly textured offering both an attractive and rugged finish.

ABOUT BAG END® LOUDSPEAKERS

Bag End loudspeakers began in 1976 in a small shop by people dedicated to the pursuit of making high quality loudspeaker systems. Over the decades Bag End® has employed the very best construction techniques and innovative acoustical designs into their products. The ground breaking introductions of the Time-Align® and ELF™ Technologies into sound reinforcement and studio monitor loudspeakers in the 1980's was followed by Minima One™ self-powered systems and the highly unique E-Trap™, electronic bass trap. Over the decades, Bag End® has been a leader in providing uniquely good sounding products and extraordinary service to our customers world wide.



DIMENSIONS

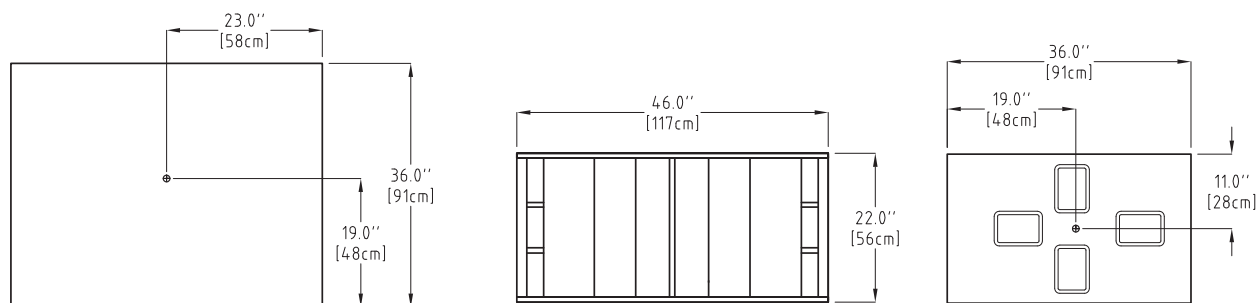

⊕ = Center of Gravity ○ = M10 Threaded Rigging Point