

PM-6 TIME-ALIGN®


SELF-POWERED

APPLICATIONS

Recording Studio Nearfield Monitor Screening Room
Surround Monitoring Reference Home Listening Systems
Laboratory Reference System

DESCRIPTION

The PM-6 is a Self Powered 6.5 inch, 2-way, coaxial Time-Aligned™ loudspeaker system designed for critical near field studio monitoring applications. Designed as a Nearfield™ Monitor the PM-6 offers accurate time and frequency information within the near field listening area. Despite its small size it has high acoustic output and unsurpassed clarity and resolution of detail. The Coaxial Design insures uniform response in the horizontal and vertical position. The wide uniform dispersion expands the sweet spot to allow 2 people to sit side by side in the near field and experience the same frequency response.

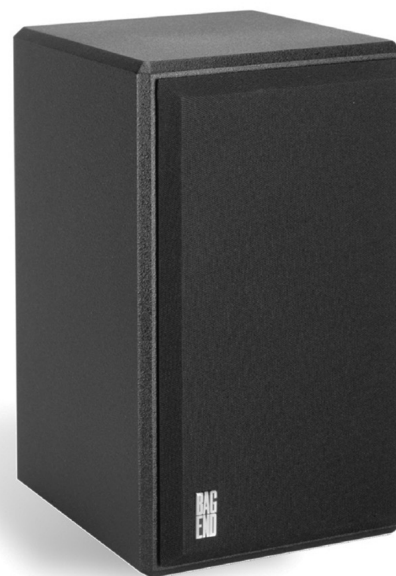

SPECIFICATIONS

System Type:

2-way coaxial sealed 0.4 ft³

Enclosure:

3/4" MDF

Finish:

Black Ro Tex™ True water born environmental finish

Grille:

Black nylon cloth over wood frame

Low Frequency Components:

Low/Mid Frequency Transducer, 6.5" Cone, 1.5" Voice coil

High Frequency Components:

1" Soft Dome Coaxially Mounted Neodymium Tweeter

Input Connector:

3 pin female XLR

Input Impedance:

10K Ohms

Input CAL Sensitivity:

+4 dBu

Maximum Continuous Amplifier Power:

150 W into 8 Ohms

High Pass Filter:

None

Overload Protection:

None

LED Indicators:

Green - On

Mains Voltage Requirements:

120 v or 230 v internally switchable

Crossover Type:

Passive Time-Align® equalizer filter @ 3.5 kHz

Time Offset Between Driver:

< ± 25 Microseconds
300Hz to 10kHz

Sensitivity:

87 dB SPL (2.83 V @ 1m)

Frequency Response:

60 Hz to 20 kHz ±3 dB

Low Frequency Limit:

45 Hz (-10dB)

Distortion:

Less than 3% THD or IMD (94 dB SPL @ 1m)

Recommended High Pass Filter:

50 Hz Butterworth 12 dB/octave

Polarity:

A positive asymmetrical signal applied to pin 2 will result in a positive asymmetrical acoustical pressure

Dimensions:

14" h x 9" w x 9" d
36 cm x 23 cm x 23 cm

Weight:

18 lbs
8 kg

Custom Finishes:

Optional custom finishes include standard white, unfinished ready to paint, or high gloss automotive paint

TIME-ALIGN®, TIME-ALIGNED™ and TIME-ALIGNMENT™, NFM™, and NEARFIELD MONITOR™ are trademarks of E.M. Long Associates.
BAG END® is a registered trademark of Bag End, Inc.

PM-6 TIME-ALIGN®

ABOUT TIME-ALIGN® TECHNOLOGY

Time-Align® assures that the fundamental and overtones of a complex, transient, acoustical signal are presented to the listener in the same relationship as the electrical signal at the input terminals of the loudspeaker. The conventional loudspeaker spreads out the sound in time. When a rapid series of transients occur the results are blurring and lost detail. With Time-Align®, a transient is presented as a tight package of energy, with the same time relationships as the natural sound. This means that a rapid series of transients will be heard clearly.



True Time-Alignment™ requires much more than just physically lining up the loudspeaker components. It requires consideration of the driver placement, driver delay and adjustment of the crossover delay parameters. This achieves the precise simultaneous acoustical arrival time of each driver throughout the crossover region.

The first Time-Aligned™ Loudspeaker was invented by EM Long Associates in 1976 utilizing the Time-Align® generator invented and built by Ronald Wickersham. In 1980 Bag End® incorporated Time-Align® technology into our full range loudspeaker systems. Along with state-of-the-art laboratory instruments, the proprietary Time-Align® generator is still in use today to verify the time domain performance of our loudspeaker systems. When comparing a genuine Bag End® Time-Aligned™ loudspeaker system to any other, our technology and design is easy to hear and appreciate. The dramatic clarity, realism, and overall pleasant sound of our Time-Aligned™ systems are well noted worldwide.

ABOUT OUR RO TEX™ FINISH

The durable Ro Tex™ finish is double layered on Bag End™ "R" series or Road cabinets. And single layered on installation or "I" cabinets. Ro Tex™ is a water born environmentally safe finish. It's uniquely strong and long

lasting. As it solidifies it attaches and bonds to the wooden cabinet to make a super hard and durable permanent finish. Its light texture offers an attractive and rugged finished look

ABOUT BAG END® LOUSPEAKERS

Bag End loudspeakers began in 1976 in a small shop by people dedicated to the pursuit of making high quality loudspeaker systems. Over the decades Bag End® has employed the very best construction techniques and innovative acoustical designs into their products. The ground breaking introductions of the Time-Align® and ELF™ Technologies into sound reinforcement and studio monitor loudspeakers in the 1980's was followed by Minima One™ self-powered systems and the highly unique E-Trap™, electronic bass trap. Over the decades, Bag End® has been a leader in providing uniquely good sounding products and extraordinary service to our customers world wide.

DIMENSIONS

