

TA6002-R TIME-ALIGN®

APPLICATIONS

Portable Sound Reinforcement Portable DJ Systems
Portable Audio-Visual Systems Surround Sound Systems
House of Worship
Theatrical Sound Reinforcement

DESCRIPTION

The TA6002-R produces high definition high impact sound over its wide angle making audience coverage easy and effective in a variety of venues. A compact loudspeaker, engineered for exceptional mid field and near field performance it is well known for exceptional fidelity and its surprisingly high output capability.

Useful for foreground and background music applications, it also excels for speech projection and small PA systems. With its fidelity, size and output its perfect for multi channel 5.1 presentations systems. In larger audio systems the TA6002-R is highly effective as a fill, delay or under balcony speaker. The addition of a Bag End subwoofer will expand its capabilities for more demanding applications. Multiple fly points and internal stand mount adapter make the TA6002-R a convenient and flexible choice a multitude of portable or permanent applications.



SPECIFICATIONS

System Type

2-way vented 0,6 ft³

Enclosure

15 mm 11-ply birch plywood

Finish

Black Ro Tex™ true water born environmental finish

Grille

16 Gauge black powder coated perforated steel

Low Frequency Components

2 - E-6A 6.5" Drivers, 1.5" Voice coil, 30 oz Magnet

High Frequency Components

E-700 1" Exit compression driver, 1.8" Titanium diaphragm, 15 oz Magnet, Radial waveguide

Input Connector

Dual Neutrik® speakON

Internal Amplification

Optional self powered

Hardware

35 mm Stand adapter
Fly points

Fly Points Safe Working Load

100 lbs Upper most rigging points

Crossover Type

Passive Time-Align® equalizer type at 2.1 kHz

Time Offset Between Driver

< ± 25 Microseconds

Sensitivity

95 dB SPL (2.83 V @ 1 m)

Frequency Response

95 Hz to 20 kHz ±3 dB

Low Frequency Limit

80 Hz

Maximum Calculated Continuous Acoustic Output

120 dB SPL @ 1 m

Power Handling

180 W continuous (IEC)
360 W program

Recommended Amplifier Power

180 to 360 W at rated impedance

Rated Impedance

8 ohms

Coverage Pattern

80 degrees horizontal (-6 dB)
60 degrees vertical (-6 dB)
Rotatable horn

Recommended High Pass Filter

80 Hz

Polarity

A positive asymmetrical signal applied to the + terminal will result in a positive asymmetrical acoustical pressure

Dimensions

22.5" h x 9" w x 11" d
58 cm x 23 cm x 28 cm
Trapezoidal – 10 degree taper per side

Weight

28 lbs
13 kg

Custom Finishes

Optional custom finishes include white, unfinished ready to paint and outdoor weather treatment.

TIME-ALIGN®, TIME-ALIGNED™ and TIME-ALIGNMENT™ are trademarks of E.M. Long Associates.
INFRA™ is a trademark of Modular Sound Systems, Inc., BAG END® is a registered trademark of Bag End, Inc.

TA6002-R TIME-ALIGN®

ABOUT TIME-ALIGN® TECHNOLOGY

Time-Align® assures that the fundamental and overtones of a complex, transient, acoustical signal are presented to the listener in the same relationship as the electrical signal at the input terminals of the loudspeaker. The conventional loudspeaker spreads out the sound in time. When a rapid series of transients occur the results are blurring and lost detail. With Time-Align®, a transient is presented as a tight package of energy, with the same time relationships as the natural sound. This means that a rapid series of transients will be heard clearly.



True Time-Alignment™ requires much more than just physically lining up the loudspeaker components. It requires consideration of the driver placement, driver delay and adjustment of the crossover delay parameters. This achieves the precise simultaneous acoustical arrival time of each driver throughout the crossover region.

The first Time-Aligned™ Loudspeaker was invented by EM Long Associates in 1976 utilizing the Time-Align® generator invented and built by Ronald Wickersham. In 1980 Bag End® incorporated Time-Align® technology into our full range loudspeaker systems. Along with state-of-the-art laboratory instruments, the proprietary Time-Align® generator is still in use today to verify the time domain performance of our loudspeaker systems. When comparing a genuine Bag End® Time-Aligned™ loudspeaker system to any other, our technology and design is easy to hear and appreciate. The dramatic clarity, realism, and overall pleasant sound of our Time-Aligned™ systems are well noted worldwide.

ABOUT OUR RO TEX™ FINISH


The durable Ro Tex™ finish is found on Bag End™ "R" series or Road cabinets. Ro Tex™ is a water base, environmentally safe finish that is made in Europe and is uniquely strong and long lasting. As it solidifies and

attaches to the wooden cabinet it bonds with the wood to make a super hard permanent finish. It is lightly textured offering both an attractive and rugged finish.

ABOUT BAG END® LOUDSPEAKERS

Bag End loudspeakers began in 1976 in a small shop by people dedicated to the pursuit of making high quality loudspeaker systems. Over the decades Bag End® has employed the very best construction techniques and innovative acoustical designs into their products. The ground breaking introductions of the Time-Align® and ELF™ Technologies into sound reinforcement and studio monitor loudspeakers in the 1980's was followed by Minima One™ self-powered systems and the highly unique E-Trap™, electronic bass trap. Over the decades, Bag End® has been a leader in providing uniquely good sounding products and extraordinary service to our customers world wide.

DIMENSIONS

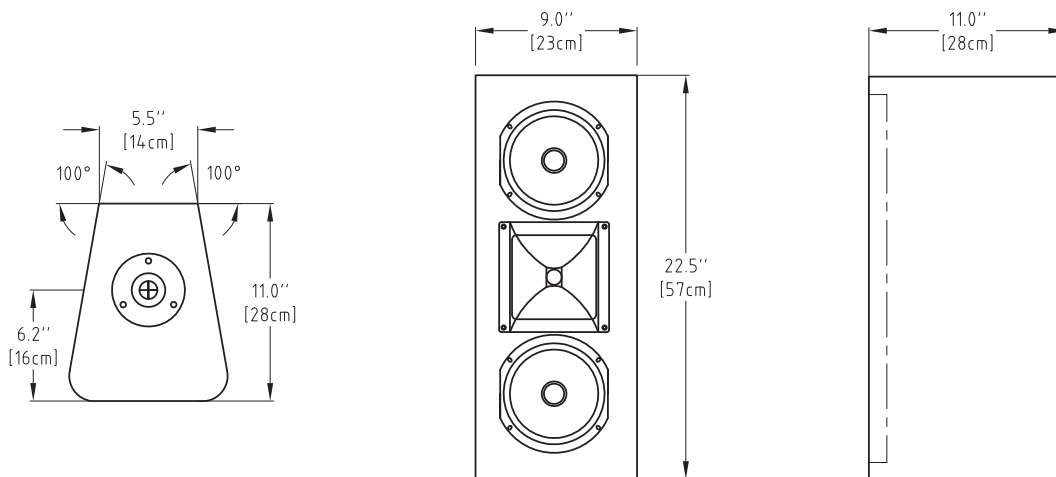

⊕ = Center of Gravity

